

2F1-120 - TWO On-Board Batteries From ONE

The **2F1-120** provides two different voltage output circuits in one on-board battery design. Thereby it can power 14.4V or 28.8V applications, including the most power hungry cinematic camera rigs. The voltage output is selected via the battery mount.

Battery Mounts:

Sold Separately

Direct Mounts:


- 2F1-Mount-14 provides a nominal 14.4V
- 2F1-Mount-28 provides a nominal 28.8V

Adaptor Mounts:

- 2F1-VMA provides V-mount compatibility @14.4V
- 2F1-ABA provides A/B-mount compatibility @14.4V

Belts with Mounts:

- B-2F1-S provide switchable 14.4V or 28.8V
- B-2F1-D provide dual simultaneous 14.4V & 24V (regulated)

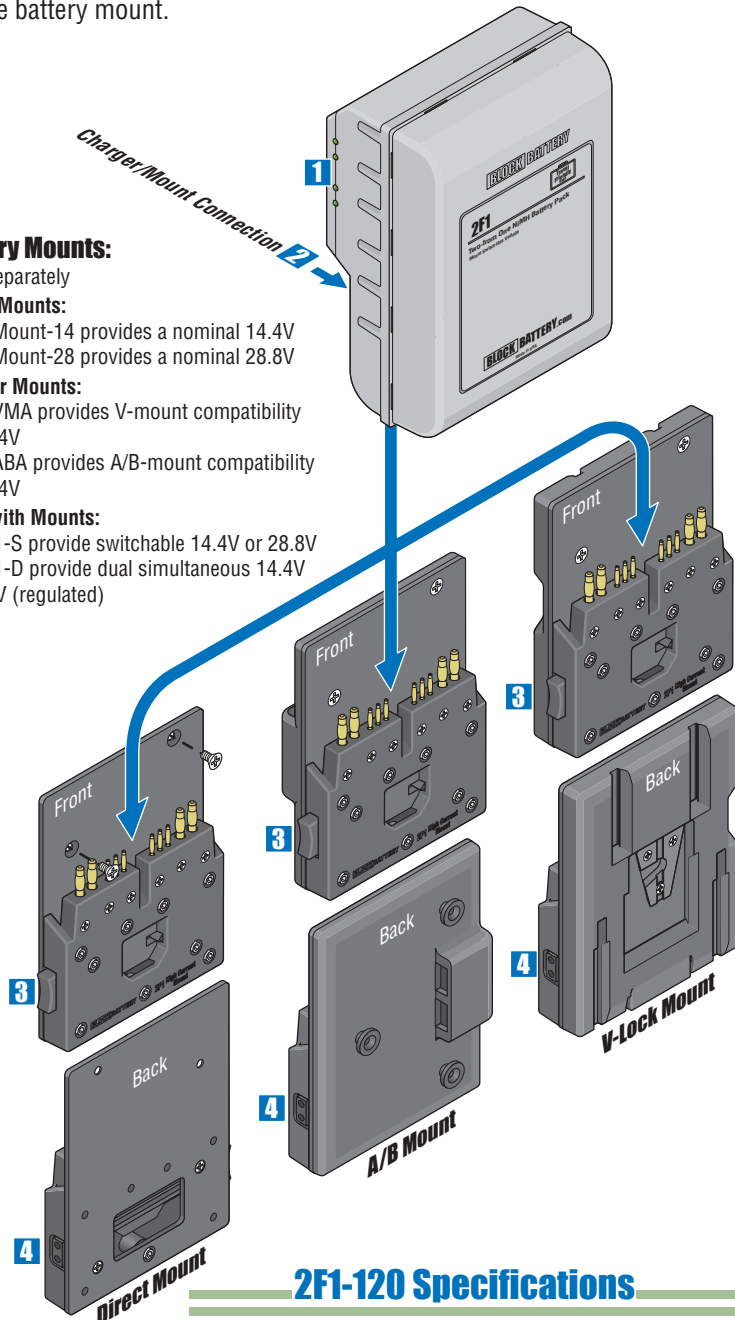

2F1-120 Specifications

2F1-120 Dimensions:

5.75" (14.6 cm) Height x 4" (10 cm) Width x 2.5" (6.3 cm) Depth

2F1-120 Weight:

3.75 lbs (1.7 Kg)

2F1-120 Battery Type:

Nickel Metal-Hydrate (NiMH)

2F1-120 is Unrestricted for Air & Ground Transport

2F1-120 Features

1 Fuel Gauge:

4 LEDs show remaining charge capacity.
All 4 LEDs ON indicates Full Charge.

2 Charger/Mount Connection:

2F1-120 slides onto OPTIONAL direct mounts, adaptor mounts or belts with mounts, see drawing. Depending on the mount, voltage output is:
Nominal 28.8 Volt (~20-34VDC)
Nominal 14.4 Volt (~10-17VDC)
Connects to 2F1-Charger OR EFC-2 Charger with optional upgrade (EFC-2-UP).

Output Capability:

The 2F1 mounts provide higher current carrying capabilities than existing on-board battery mounts.

The 2F1-120 utilizes high rate discharge cells and can handle continuous power draws up to 225 watts. Regular use at these levels will reduce overall life expectancy. Use at 125 watts or less will improve overall life expectancy.

Caution: Use **BLOCK BATTERY** chargers **ONLY**. Charge cycle completion is indicated with GREEN LED on charger.

3 Release Button:

Press to un-lock battery from mount

4 "D" Tap Plug:

14.4V up to 8 Amps (Not available on 2F1-Mount-28)

2F1-120 Operation and Storage

2F1-120 slides onto OPTIONAL direct mounts, adaptor mounts or belts with mounts, see drawing.

Power Output Amount when Fully Charged:

120 watt hours, or 8.4 amp hours @ 14VDC, or 4.2 amp hours @ 28VDC.

Estimated Runtime: ~ 1.2 hours on Alexa, or 3/4 hour on F65, depending on camera rig accessories

Charging Time for Empty Battery:

~ 1.5 hours on to 2F1-Charger, OR EFC-2 Charger with optional upgrade (EFC-2-UP).

Short Term 2F1-120 Storage (Up to 1 Week):

5° to 25°C (41° to 77°F)

Not mounted on camera. OK to leave on charger.

Long Term 2F1-120 Storage (More than 1 Week):

5° to 25°C (41° to 77°F)

Fully charge battery. Not mounted on camera.

Do not leave on charger. Recharge every two months.

For technical support call:

1-888-424-6322