


# 2F1-S-BOX - 14 or 28VDC Switchable 2F1 Mount Adapter

Switchable voltage 2F1 battery mount box with switchable 14V or 28V; output connectors - one 4 pin XLR (14.4V) & one 3 pin XLR (28.8V); includes adapter post for mafer clamp. **Output capacity 240 WH via two 2F1-120 batteries sold separately.**

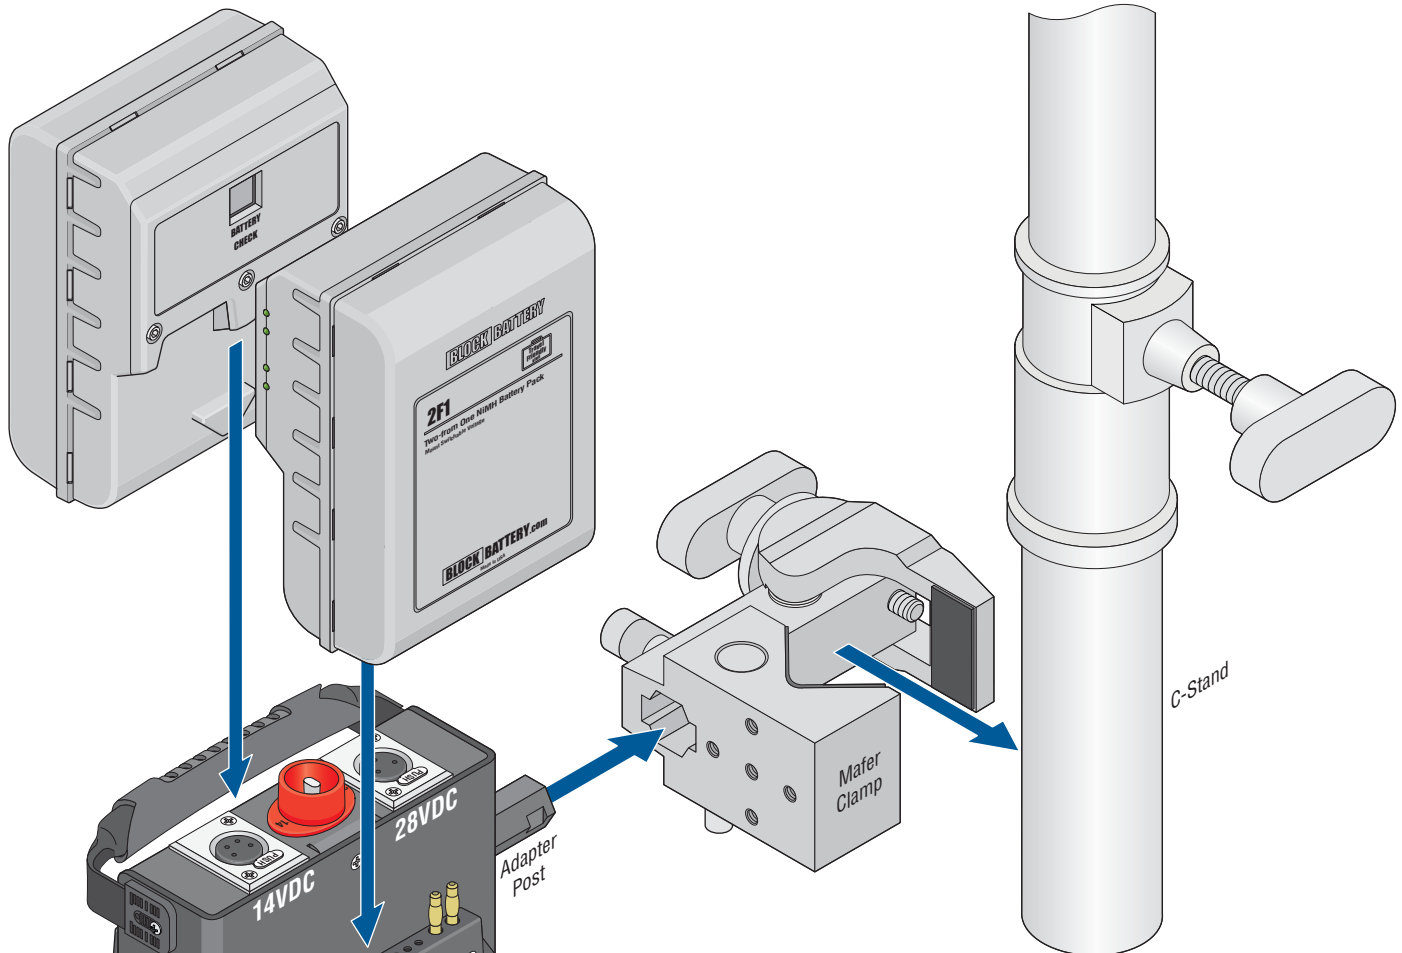

## 2F1-S-Box Features

- The 2F1-S-Box can be conveniently mounted directly to the C Stand using a Mafer clamp.
- The 2F1-S-Box can power any 14VDC or 28VDC light up to 200 Watts off a single battery. Great solution for lights and equipment with voltage ranges from 12VDC to 34VDC.
- Accepts two 2F1 style batteries simultaneously for a total of 240WHrs of output capacity.

### Estimated run times:

Aadyntech Jab with **dual** 2F1 batteries mounted approx. 1 hour in 28vdc mode.

Fiilex P200 with **single** 2F1 battery mounted approx. 2 hours in 14vdc mode.

Fiilex P200 with **dual** 2F1 batteries mounted approx. 4 hours in 14vdc mode.

Fiilex P360 with **single** 2F1 battery mounted approx. 1.25 hours in 14vdc mode.

Fiilex P360 with **dual** 2F1 batteries mounted approx. 2.5 hours in 14vdc mode.

Fiilex Q500 with **single** 2F1 battery mounted approx. 45 minutes in 28vdc mode.

Fiilex Q500 with **dual** 2F1 batteries mounted approx. 1.5 hours in 28vdc mode.

Fill Lite FL-200 with **single** 2F1 Battery mounted approx. 2 hours in 28vdc mode.

Joker 200 with **dual** 2F1 batteries mounted approx. 30 minutes in 28vdc mode.

## 2F1-S-Box Specifications

### 2F1-S-Box Dimensions:

6" (15.2 cm) Height x 6" (15.2 cm) Width x 3" (7.7 cm) Depth

### 2F1-S-Box Weight:

2 lbs (0.9 Kg) without batteries

### 2F1-S-Box Output Connectors:

4-Pin XLR 10-17VDC @ 15 Amps

3-Pin XLR 20-34VDC @ 15 Amps

**For technical support call:**

**1-888-424-6322**