


## The Protean - The 150 WattHour Everything Battery

The **Protean Battery** from Block Battery is the first camera battery to offer **five power solutions** in one small, powerful, and light weight package. While preparing for a production it's not unusual to need both **14volt** and **28volt** batteries with a variety of mounts to support production equipment. The Protean provides a quick and easy configuration between **14 volt** and **28 volt** batteries with a variety of mount configurations to protect your most expensive equipment. The Protean also provides a quick and easy way to prepare a **150 watt lithium battery** for shipping and travel. When configured as a **14V V-Lock** battery, the Protean provides a **D-Tap** and compatibility to all **Sony Style 14V V-Lock** Batteries. When configured as a **28V B-Mount** battery, the Protean has **NO D-Tap** and is compatible with the **B-Mount** 28 volt on camera batteries. The Protean can also be switched to a **28V Gold-Mount module** to make the Protean compatible with 28volt Gold-Mount Plus style mounts. And finally the Protean can be switched to the **14V Gold-Mount module** that makes the Protean compatible with the 14volt Gold-Mount style mount including the industry standard D-Tap. In travel mode, the Protean is configured as two mechanically and electrically isolated 75whr batteries making it **easy to carry-on or ship** as needed.

### Third T-Stud:

Used with 14V and 28V Gold Mount modules ONLY.

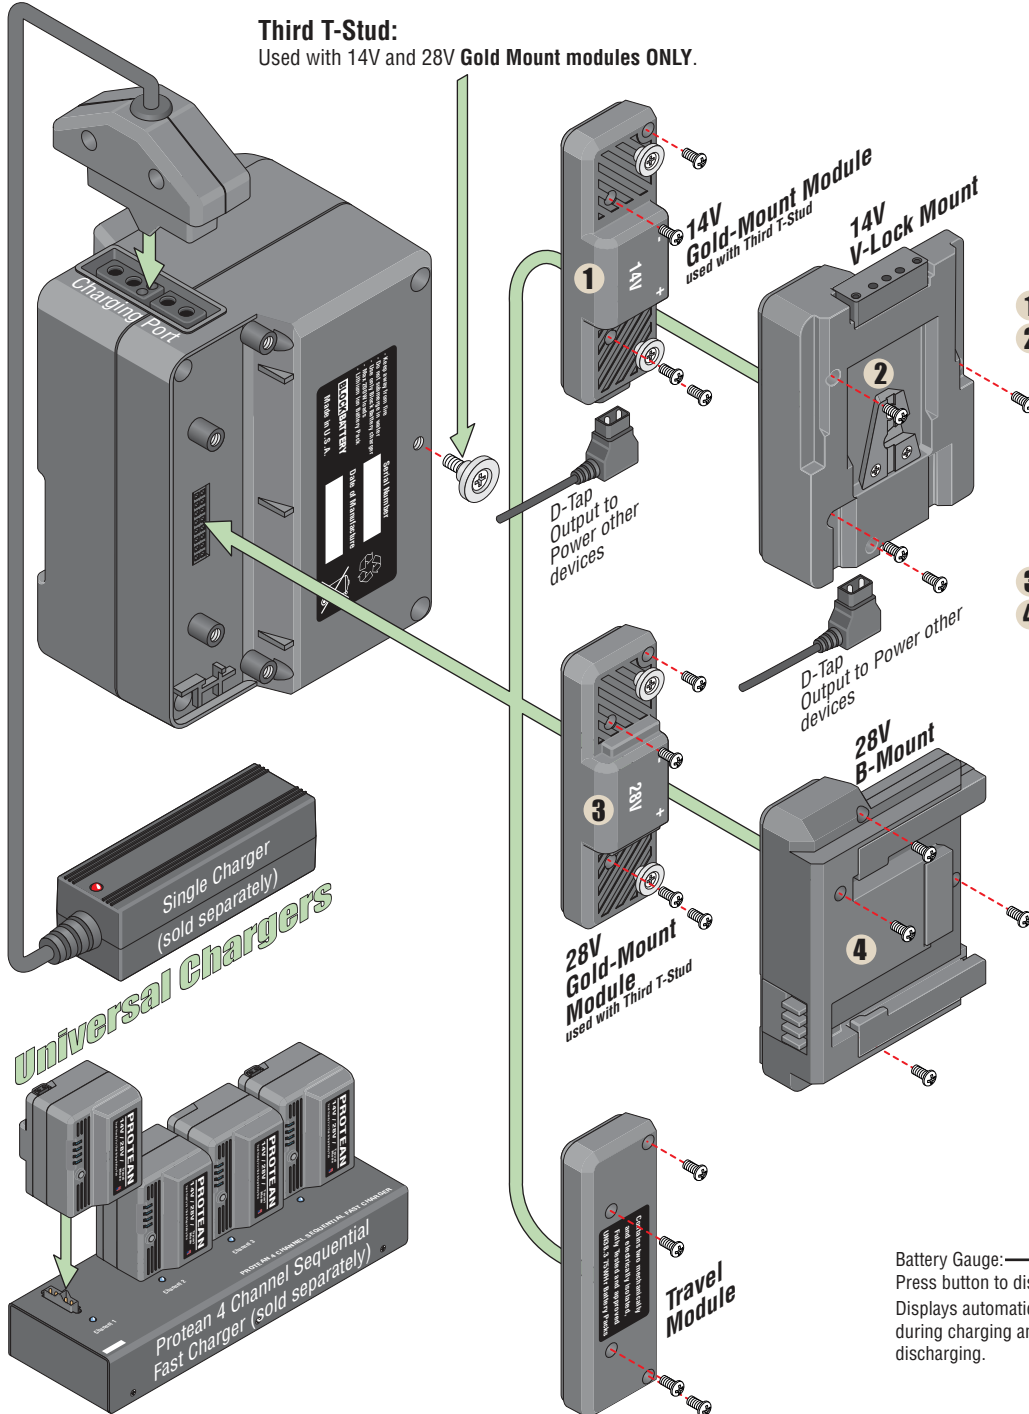

### Instructions for configuring:

1. Remove the **4 machine screws** on the back of the battery.
2. Attach chosen mount to configure the battery as desired. Remove three stud mount for Gold Mounts **ONLY**.

**NOTE:** Regardless of the configuration, all Protean batteries can be charged on the Block Battery Protean universal chargers, **SOLD SEPARATELY**.

### 14V Options: SOLD SEPARATELY

- 1 14V Gold-Mount Module (Third T-Stud)
- 2 14V V-Lock Mount

Voltage Range: 13vdc – 16.8vdc  
Capacity: **150WHrs**  
D-Tap Output included: Yes  
Recommended maximum Current: limited by battery mount up to **12 amps** continuous

### 28V Options: SOLD SEPARATELY

- 3 28V Gold-Mount Module (Third T-Stud)
- 4 28V B-Mount

Voltage Range: 26vdc – 33.6vdc  
Capacity: **150WHrs**  
D-Tap: No  
Recommended maximum Current: limited by battery mount up to **10 amps** continuous

### Travel Module:

Two mechanically and electrically isolated **75whr** batteries - **Included** with battery **ALL** other mounts are **OPTIONAL**.

### Specifications:

Weight: 11b 13 oz  
Size: H 4.7" x W 3.5" x D 3.2"  
Recharge Cycles : >1000

Battery Gauge:  
Press button to display.  
Displays automatically during charging and discharging.

For technical support call:

**1-888-424-6322**