


T-POT - 14/28VDC or 28/48VDC Dual Voltage Mount Adapter

The T-Pot Dual Voltage Battery Mount Box with dual voltages and under voltage cutoff protection can be ordered for use with AB, V-Lock or 2F1 Mount Batteries. The T-Pot comes standard with a Mafer Post for mounting directly to a C-Stand. Output capacity and run times are determined by the batteries used.

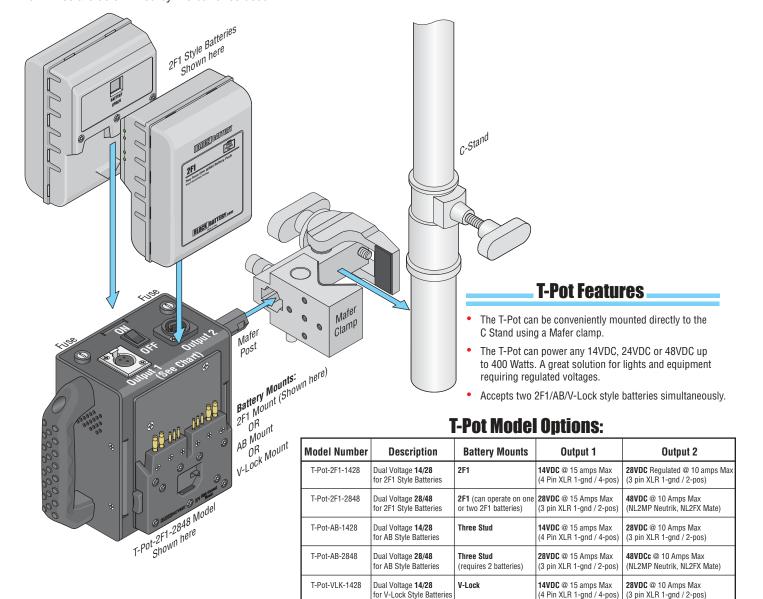

T-Pot-VLK-2848

Dual Voltage 28/48

for V-Lock Style Batteries

T-Pot Specifications

T-Pot Dimensions:

6.5" (16.5 cm) Height x 8" (20.3 cm) Width x 4" (10.1 cm) Depth

T-Pot Weight:

4 lbs (1.8 Kg) without batteries

T-Pot Output Connector Options:

4-Pin XLR 10~17VDC @ 15 Amps 3-Pin XLR Regulated 24VDC @ 10 Amps 48VDC @ 10.4 Amps

For technical support call:

28VDC @ 15 Amps Max

(3 pin XLR 1-gnd / 2-pos)

(requires 2 batteries)

1-888-424-6322

48VDC @ 10 Amps Max

(NL2MP Neutrik, NL2FX Mate)