


T-Pot - 14/28VDC or 28/48VDC Dual Voltage Mount Adapter

The T-Pot Dual Voltage Battery Mount Box with dual voltages and under voltage cutoff protection can be ordered for use with AB, V-Lock or 2F1 Mount Batteries. The T-Pot comes standard with a Mafer Post for mounting directly to a C-Stand. Output capacity and run times are determined by the batteries used.

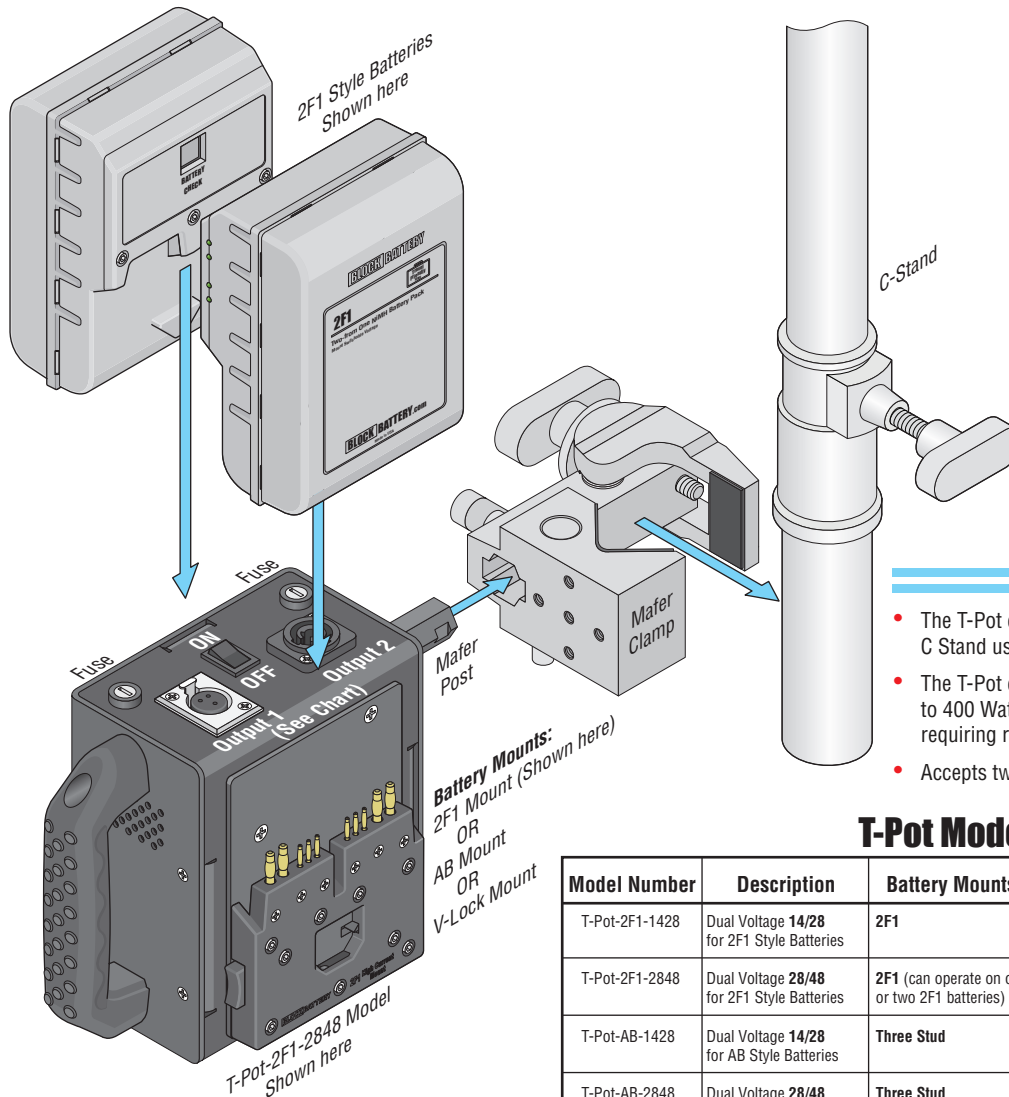

T-Pot Features

- The T-Pot can be conveniently mounted directly to the C Stand using a Mafer clamp.
- The T-Pot can power any 14VDC, 24VDC or 48VDC up to 400 Watts. A great solution for lights and equipment requiring regulated voltages.
- Accepts two 2F1/AB/V-Lock style batteries simultaneously.

T-Pot Model Options:

Model Number	Description	Battery Mounts	Output 1	Output 2
T-Pot-2F1-1428	Dual Voltage 14/28 for 2F1 Style Batteries	2F1	14VDC @ 15 amps Max (4 Pin XLR 1-gnd / 4-pos)	28VDC Regulated @ 10 amps Max (3 pin XLR 1-gnd / 2-pos)
T-Pot-2F1-2848	Dual Voltage 28/48 for 2F1 Style Batteries	2F1 (can operate on one or two 2F1 batteries)	28VDC @ 15 Amps Max (3 pin XLR 1-gnd / 2-pos)	48VDC @ 10 Amps Max (NL2MP Neutrik, NL2FX Mate)
T-Pot-AB-1428	Dual Voltage 14/28 for AB Style Batteries	Three Stud	14VDC @ 15 amps Max (4 Pin XLR 1-gnd / 4-pos)	28VDC @ 10 Amps Max (3 pin XLR 1-gnd / 2-pos)
T-Pot-AB-2848	Dual Voltage 28/48 for AB Style Batteries	Three Stud (requires 2 batteries)	28VDC @ 15 Amps Max (3 pin XLR 1-gnd / 2-pos)	48VDC @ 10 Amps Max (NL2MP Neutrik, NL2FX Mate)
T-Pot-VLK-1428	Dual Voltage 14/28 for V-Lock Style Batteries	V-Lock	14VDC @ 15 amps Max (4 Pin XLR 1-gnd / 4-pos)	28VDC @ 10 Amps Max (3 pin XLR 1-gnd / 2-pos)
T-Pot-VLK-2848	Dual Voltage 28/48 for V-Lock Style Batteries	V-Lock (requires 2 batteries)	28VDC @ 15 Amps Max (3 pin XLR 1-gnd / 2-pos)	48VDC @ 10 Amps Max (NL2MP Neutrik, NL2FX Mate)

T-Pot Specifications

T-Pot Dimensions:

6.5" (16.5 cm) Height x 8" (20.3 cm) Width x 4" (10.1 cm) Depth

T-Pot Weight:

4 lbs (1.8 Kg) without batteries

T-Pot Output Connector Options:

4-Pin XLR 10~17VDC @ 15 Amps

3-Pin XLR Regulated 24VDC @ 10 Amps

48VDC @ 10.4 Amps

T-Pot-B-6-19

Copyright 2019 NK Products Inc. All rights reserved.

For technical support call:

1-888-424-6322