

LK-76 - 14.4V Linkey Block

The Linkey Block is the most universal accessory battery in the market. A true 14.4 volt professional battery, the Linkey Block can power (via the D-Tap connector) any load up to 10 amps. The Linkey Block's unique design allows it to slip easily into a **RoboCup**, or clip quickly onto any C-Stand. The two threaded inserts on either end of the Linkey Block allow attachment to baby pins, monitors, or receivers. The Linkey Block has two simultaneous USB outputs at 2.5 amps each.

Included in the package:

- 76Whr Battery
- Fast Charger
- C-Stand Mount
- 2-Threaded Adapters

Clips for changing C-Stand Mounts available from McMaster Carr:

Beckson Part Number	Description	McMaster Part Number
CLP-3/4	3/4" Riser	1171A71
CLP-1	1 1/8" Riser (Comes Standard)	1171A72
CLP-1-1/4	1 3/8" Stand	1171A73

LK-76 Features

1 LED Fuel Gauge Description:

The digital LED fuel gauge on the Linkey Block tracks the remaining energy left in the battery. When the battery is powered on, but not actively being discharged or charged, the battery enters an idle mode. In the idle mode the LEDs will cycle one at a time to conserve energy until the battery senses it is being charged or discharged, the LEDs will remain on and display remaining energy level when the battery is in use.

2 C-Stand Mount (Removable):

Clips on standard C-Stand.

3 2-Threaded Adapters:

3/8" to 1/4".

4 2 USB Outputs:

2.5 Amps each.

5 Power Switch:

Slide to turn on power. LEDs will light.

6 D-Tap Connector:

Powers 14.4V up to 10 Amps


7 D-Tap Charger:

Caution: Use ONLY BLOCK BATTERY charger.

Red LED - Charging

Green LED - Full Charge

Charge time of ~1.5-2.0 Hours

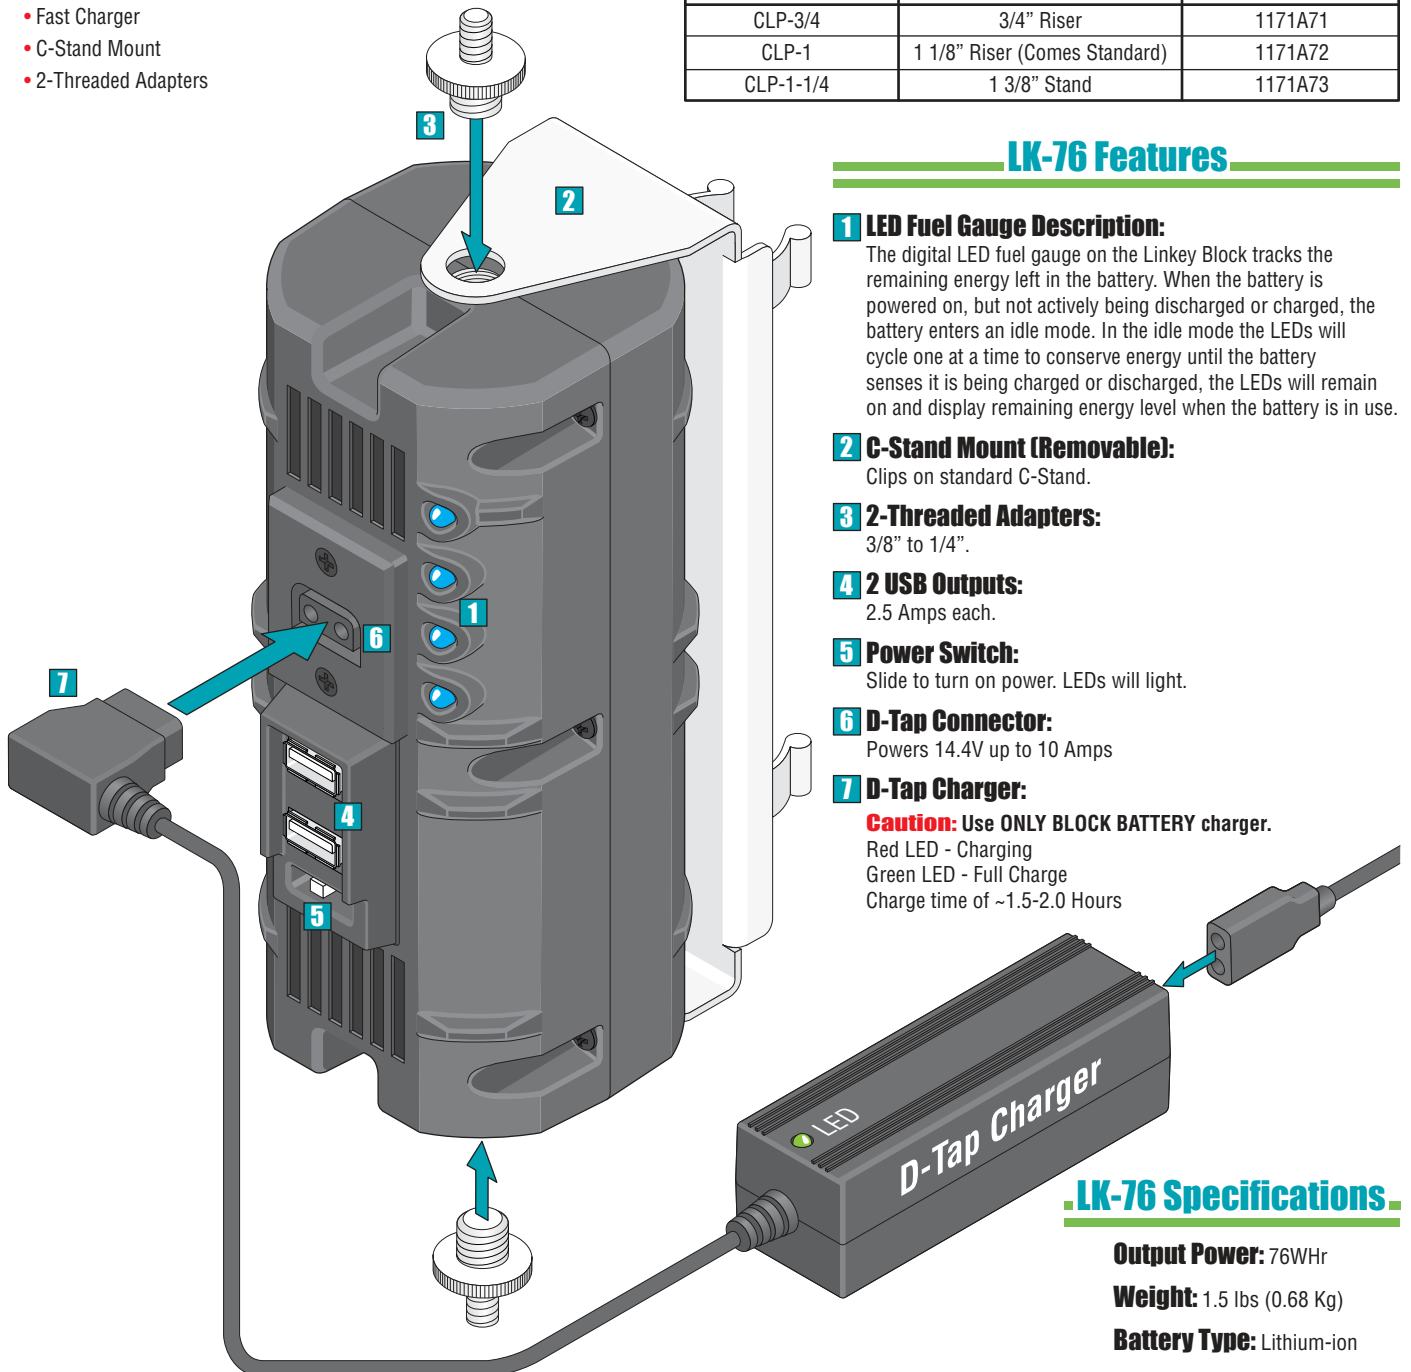

LK-76 Specifications

Output Power: 76Whr

Weight: 1.5 lbs (0.68 Kg)

Battery Type: Lithium-ion

For technical support call:

1-888-424-6322